



Technical Specification/ Product Datasheet

KK-FRP AND KONCRETE PRODUCTS PVT LTD

1114 Hubtown Solaris
Prof N.S Phadke Road, Andheri (E)
Mumbai-400 069
INDIA
Ph: +91 22 66913250 ,
Mob: +91 9822036550 / 9850089903 ,
email: info@kkfrp.com / kkmgnsk@gmail.com
Web: www.kkfrp.com




Specific Product Code/s:	MCMD03
Product Group:	KK-FRP FIBREGLASS COMPOSITE MANHOLE COVER & FRAME
Sub-Category:	Medium Duty MD 12.5 T Cap. As per BSEN124:2015
Material Composition :	Unsaturated Polyester Resin UV Resistant ISO Grade, Emulsion Fibreglass Matt E Class, Accelerators, UV Resistant Pigment, Polymer Concrete in Quartz as Core,

Basic Dimensions (mm):	Clear Opening	600 mm Dia
	Cover Size:	660 mm Dia
	Cover Height:	30 mm
	Frame Size:	730 mm Dia
	Frame Height:	60 mm

Weight (kgs): Approx. 34 kg

Load Rating Classification: B125 (12.5T)


- Features:
- FRP Manhole Cover & Frame B125 as per BSEN124.
 - Medium duty design to cope with the demands of Medium duty traffic in car parking of residential, commercial areas , Roads , carriageways, etc.
 - Key Holes 2nos with **(SS Key optional)** & Lifting device provided .
 - Choice of Colour Available.
 - Anti skid surface.
 - Waterproof, Weatherproof, Burglar proof, Non corrosive, High Strength to Wt ratio, Easy of handing as Light wt , Heat Resistant, Shockproof .
 - Provision for Logo of Buyer.
 - Additional Provision of Gasket (O-Ring) 6 mm Dia & SS Nut Bolts

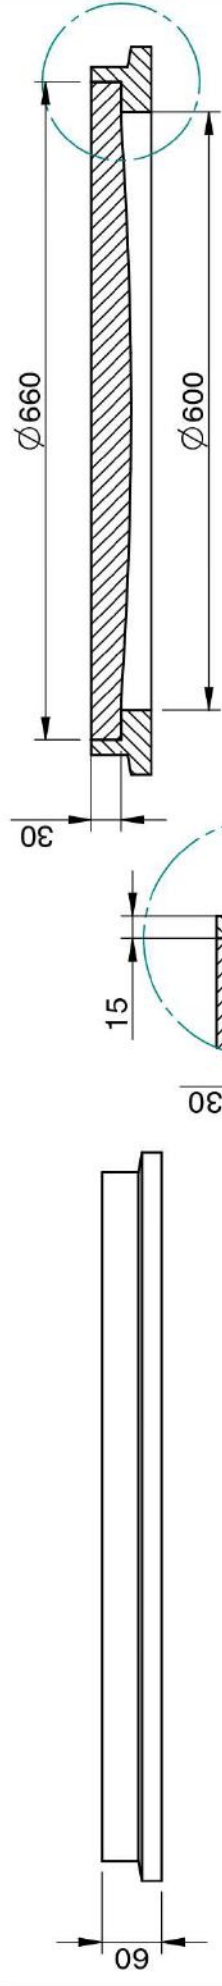



SECTION A-A

B

DETAIL B

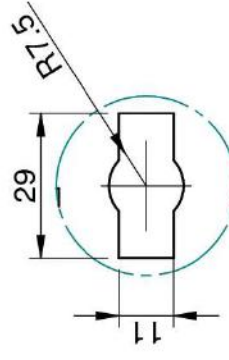

DETAIL C
KEY HOLE
FOR LIFTING

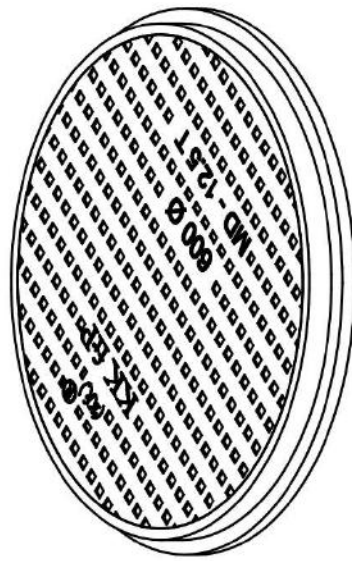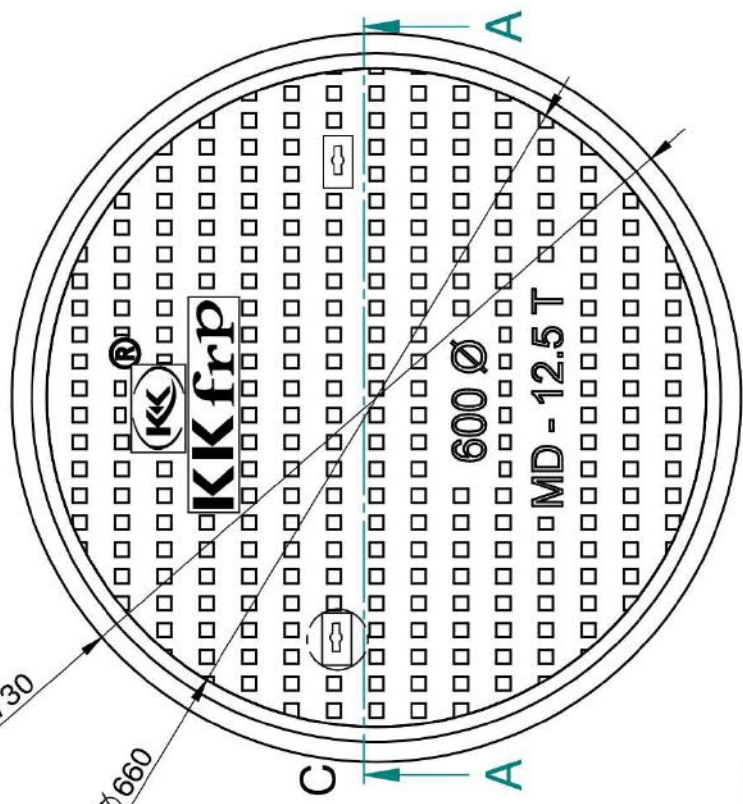

- ① CLEAR OPENING = Ø 600 MM
- ② OUTER FRAME SIZE = Ø 730 MM
- ③ OUTER COVER SIZE = Ø 660 MM
- ④ APPROX WEIGHT = 34 KG

	Drawn	RJ	Ched	AB	SCALE:	1:5	Projection:	
	DESCRIPTION:				MCMD-03	DRG. NO.		
Sheet No.				2 of 2		MCMD-03 DIA 600		
						12.5 T		

CONFIDENTIAL INFORMATION
(UNAUTHORISED DISCLOSURE PROHIBITED)



NOTE:-
1. ALL DIMENSIONS ARE IN MM.
2. DIMENSIONAL TOLERANCE +/- 1%