

Technical Specification/ Product Datasheet

KK-FRP AND KONCRETE PRODUCTS PVT LTD

1114 Hubtown Solaris Prof N.S Phadke Road, Andheri (E) Mumbai-400 069 INDIA

Ph: +91 22 66913250,

Mob: +91 9822036550 / 9850089903,

email: info@kkfrp.com / kkmgnsk@gmail.com

Web: www.kkfrp.com

Specific Product Code/s: GGLD-08

Product Group: KK-FRP FIBREGLASS COMPOSITE STORM WATER GRATING COVER & FRAME

Sub-Category: Light Duty LD 2.5 T Cap. As per BSEN124:2015

Material Composition: Unsaturated Polyster Resin UV Resistant ISO Grade, Emulsion

Fibreglass Matt É Class, Accelators, UV Resistant Pigment,

Polymer Concrete in Quartz as Core,

Basic Dimensions (mm): Clear Opening 900 x 600 mm

Cover Size: 960 x 660 mm

Cover Height: 30 mm

Frame Size: 1050 x 750 mm

Frame Height: 70 mm

Weight (kgs): Approx. 60 kg

Load Rating Classification: LD-2.5T

Features: FRP Manhole Cover & Frame LD-2.5T as per BSEN124.

Light duty design to cope with the demands of Light duty traffic in foot paths ,cycle tracks ,car parking of residential

areas etc.

Choice of Colour Available.

➤ Anti skid surface.


➤ Waterproof, Weatherproof, Burglar proof, Non corossive, High Strenght to Wt ratio, Easy of handing as Light wt,


Heat Resistant, Shockproof .

➤ Provision for Logo of Buyer.



DETAILED DRAWING KK-FRP COMPOSITE STORM WATER GRATING COVER & FRAME CLEAR OPENING 900 X 600 MM CAP 2.5T

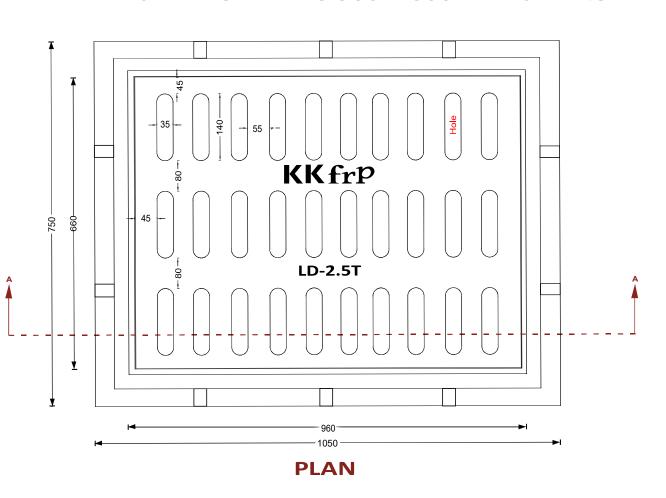

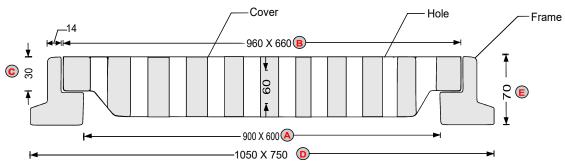

SECTION AA

ALL DIMENSIONS IN MM, DIMENSIONAL TOLERANCE +/- 1%.

CLEAR OPENING (900 X 600)	A
OUTER COVER SIZE (960 X 660)	B
OUTER FRAME SIZE (1050 X 750)	D
COVER THICKNESS (30)	C
FRAME THICKNESS (70)	E
Approx. Weight 60 kg	