Technical Specification/ Product Datasheet



KK-FRP AND KONCRETE PRODUCTS PVT LTD

1114 Hubtown Solaris Prof N.S Phadke Road, Andheri (E) Mumbai-400 069 INDIA

Ph: +91 22 66913250,

Mob: +91 9822036550 / 9850089903 ,

email: info@kkfrp.com / kkmgnsk@gmail.com

Web: www.kkfrp.com

Specific Product Code/s: RCF04

Product Group: KK-FRP FIBREGLASS RECESS COMPOSITE MANHOLE COVER & FRAME

RECESS DEPTH 60MM

Sub-Category: Extra Heavy Duty EHD 40 T Cap. As per BSEN124:2015

Material Composition: Unsaturated Polyster Resin UV Resistant ISO Grade, Emulsion

Fibreglass Matt É Class, Accelators, UV Resistant Pigment,

Polymer Concrete in Quartz as Core,

Basic Dimensions (mm): Clear Opening 600 x 450 mm

Cover Size: 660 x 510 mm

Cover Height: 90 mm

Frame Size: 770 x 620 mm

Frame Height: 120 mm

Load Rating Classification: EHD 40T

Features: FRP Recess Manhole Cover & Frame EHD-40T as per BSEN124.

➤ Heavy duty design to cope with the demands of heavily traffic in Main Roads, carriageways, Parkings etc

➤ Key Holes 2nos & Lifting device provided.


Choice of Colour Available.

➤ Waterproof, Weatherproof, Burglar proof, Non corossive, High Strenght to Wt ratio, Easy of handing as Light wt,

Heat Resistant, Shockproof.

➤ Provision for Logo of Buyer.

DETAILED DRAWING KK-FRP FIBREGLASS RECESS COMPOSITE MANHOLE COVER & FRAME CLEAR OPENING 600 X 450 MM CAP 40T

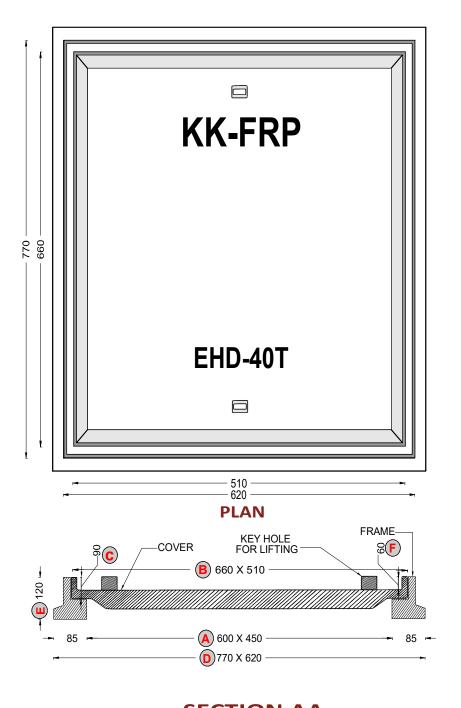



CLEAR OPENING (600 X 450)

OUTER COVER SIZE (660 X 510)

OUTER FRAME SIZE (770 X 620)

COVER THICKNESS (90)

FRAME THICKNESS (120)

SECTION AA

ALL DIMENSIONS IN MM, DIMENSIONAL TOLERANCE +/- 1%.