

KK frp Moulded Gratings

KK frp Moulded Gratings are an Ideal substitute for Hot Dip Galvanised / Mild Steel / Stainless Steel Gratings. Our Gratings are corrosion and chemical resistant, light in weight, are durable and have long life. They are available in various sizes and various resin options like Isophthalic, Vinyl & Orthophthalic Resins.



Advantages of **KK frp** Moulded Gratings.

- **LIGHT WEIGHT**- Density 4 times less than steel.
- **CORROSION RESISTANT**- It gives resistance against all chemicals.
- **IMPACT RESISTANT**- Returns to original position without permanent deflection /distortion.
- **MAINTENANCE FREE**- No painting or cleaning required .
- **EASE OF INSTALLATION** - No welding required while installation.
- **EASE OF HANDLING** - Since light weight , easy to handle .
- **LIFE CYCLE**- Long durability ensures lowest life cycle cost .
- Very high strength to weight ratio.
- High impact and fatigue strength .
- Option of fire retardant available.
- Aesthetically pleasing appearance.
- Anti skid options available.



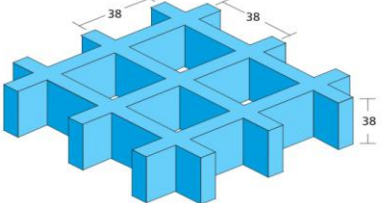
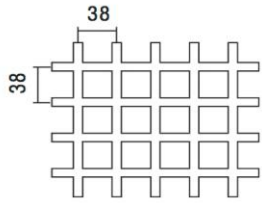

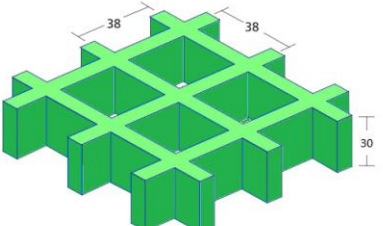
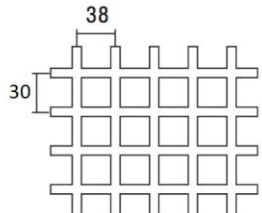

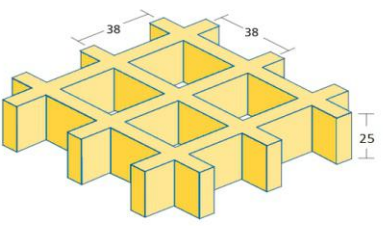
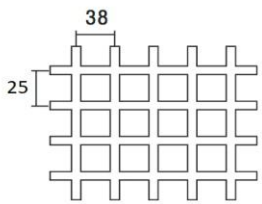

KK frp AND KONCRETE PRODUCTS PVT.LTD.

Head Office : 1114 Hubtown Solaris Prof N.S Phadke Road, Near East West Flyover Andheri (E) Mumbai-400 069, India .

Tel No: +91 22 66913250 Mob: +91 9822036550 / 9850089903 , E-mail : info@kkfrp.com/ kkmgnsk@gmail.com

SPECIFICATIONS

FRP Moulded Gratings

<p>KK frp GG-01</p> 	<p>Plan View</p>  <p>Elevation View</p> 	<p>38mm thick, 38x38mm square mesh, bearing bars run both direction</p> <p>Bearing bar thickness (Top/Bottom) : 7.0/5.0</p> <p>Bearing bar center : 38</p> <p>Open Area : 68%</p> <p>Approx. Weight : 19.50 kgs/m²</p> <p>Panel size available : 1220 x 3660,</p>
<p>KK frp GG-02</p> 	<p>Plan View</p>  <p>Elevation View</p> 	<p>30mm thick, 38x38mm square mesh, bearing bars run both direction</p> <p>Bearing bar thickness (Top/Bottom) : 7.0/5.0</p> <p>Bearing bar center : 38</p> <p>Open Area : 68%</p> <p>Approx. Weight : 14.10 kgs/m²</p> <p>Panel size available : 1220 x 3660</p>
<p>KK frp GG-03</p> 	<p>Plan View</p>  <p>Elevation View</p> 	<p>25mm thick, 38x38mm square mesh, bearing bars run both direction</p> <p>Bearing bar thickness (Top/Bottom) : 7.0/5.0</p> <p>Bearing bar center : 38</p> <p>Open Area : 68%</p> <p>Approx. Weight : 11.90 kgs/m²</p> <p>Panel size available : 1220 x 3660</p>


Applications of KK frp Moulded Gratings

- Channel drain covers
- Elevated Car Park
- Swimming pool
- Gardens
- Fencing
- Floorings
- Staircase
- Walkways
- Foot Bridges
- Platforms
- Trench Covers
- Earth Pit Covers
- Water treatment plants


Resin Varients - Isophthalic, Vinyl Ester , Bisphenol Resins.
Choice of Colours



Black



Light Grey




Dark Grey



Green



Yellow



Blue



Orange



Brown