Technical Specification/ Product Datasheet



KK-FRP AND KONCRETE PRODUCTS PVT LTD

1114 Hubtown Solaris Prof N.S Phadke Road, Andheri (E) Mumbai-400 069 INDIA

Ph: +91 22 66913250,

Mob: +91 9822036550 / 9850089903,

email: info@kkfrp.com / kkmgnsk@gmail.com

Web: www.kkfrp.com



Specific Product Code/s: GGFC16

Product Group: KK SFRC CONCRETE GRATING COVER & FRAME

Sub-Category: Heavy Duty HD 20 T Cap. As per IS:12592:2002

Material Composition: Ordinary Portland Cement 53 Grade.

Reinforcement 10 mm TMT Bars Fe 500 Grade,

MS Sheet at edges 1.30 mm thick

Concrete Grade : M40

Water Cement Ratio: 0.35

Basic Dimensions (mm): Clear Opening 450 x 450 mm

Cover Size: 550 x 550 mm

Cover Height: 70 mm

Frame Size: 680 x 680 mm

Frame Height: 125 mm

Weight (kgs): Approx. 120 kg

Load Rating Classification: HD 20T

Features:

>SFRC Concrete Grating Cover & Frame HD-20T as per IS:12592:2002.

Heavy duty design to cope with the demands of heavy traffic in Main Roads, carriageways, Parkings etc

▶ 2 Nos Lifting Hooks 12 mm Dia TMT Bars provided .


➤ Anti skid surface.

➤ Waterproof, Weatherproof, Burglar proof, Non corossive,

High Strenght,

Heat Resistant, Shockproof.



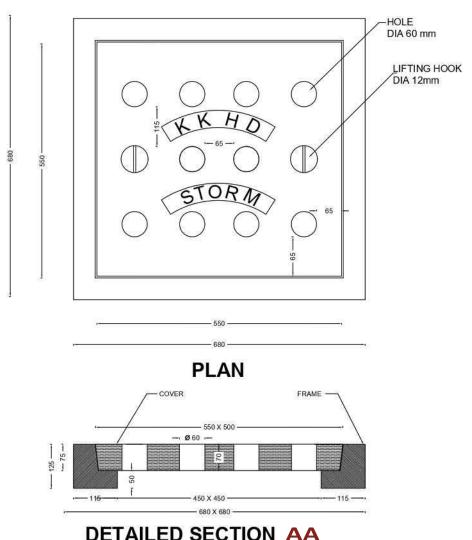

DETAILED SECTION AA

KK-FRP AND KONCRETE PRODUCTS PVT LTD KK-FRP AND KONCRETE PRODUCTS PVT LTD
TECHNICAL SPECIFICATION:
HEAVY DUTY SQUARE
SFRC CONCRETE GRATING COVER AND FRAME HD 20T
CLEAR OPENING: 450 X 450 MM
COVER SIZE: 550 X 550 X 70 MM
FRAME SIZE: 680 X 680 X125MM
WEIGHT PER SET 125 KGS.
LOAD CAPACITY AS PER IS:12592-2002 20T
(ALL DIMENSIONS ARE IN MM)
DIMENSIONAL TOLERANCE +5MM