Technical Specification/ Product Datasheet

KK Koncrete Durability - Strength -Quality

KK-FRP AND KONCRETE PRODUCTS PVT LTD

1114 Hubtown Solaris Prof N.S Phadke Road, Andheri (E) Mumbai-400 069 INDIA

Ph: +91 22 66913250,

Mob: +91 9822036550 / 9850089903,

email: info@kkfrp.com / kkmgnsk@gmail.com

Web: www.kkfrp.com



Specific Product Code/s: GGFC37

Product Group: KK SFRC CONCRETE GRATING COVER & FRAME
Sub-Category: Light Duty LD 2.5T Cap. As per IS:12592:2002

Material Composition: Ordinary Portland Cement 53 Grade.

Reinforcement 6 TMT. Bars Fe 500 Grade,

MS Sheet at edges 1.30 mm thick.

Concrete Grade: M40
Water Cement Ratio: 0.35

Basic Dimensions (mm): Clear Opening 600 x 600 mm

Cover Size: 700 x 700 mm

Cover Height: 50 mm

Frame Size: 830 x 830 mm

Frame Height: 100 mm

Weight (kgs): Approx. 125 kgs

Load Rating Classification: LD 2.5T

Features: >SFRC Concrete Grating Cover & Frame LD 2.5T as per IS:12592:2002.

Light duty design to cope with the demands of Light duty traffic in foot paths, cycle tracks, car parking of residential areas etc

▶2 Nos Lifting Hooks 8 mm Dia TMT Bar .


Choice of Colour Available.

Anti skid surface.

➤ Waterproof, Weatherproof, Burglar proof, Non corossive,

High Strenght to Wt ratio, Heat Resistant, Shockproof.



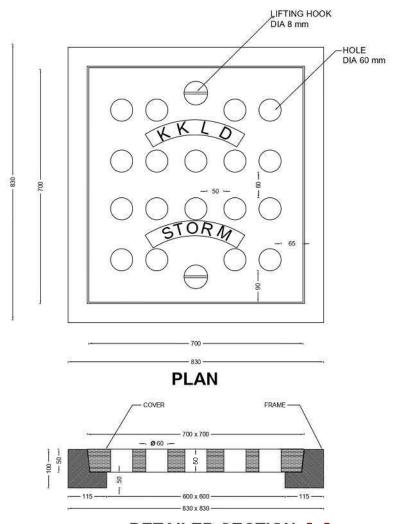

DETAILED SECTION AA

KK-FRP AND KONCRETE PRODUCTS PVT LTD

KK-FRP AND KONCRETE PRODUCTS PVT LTD
TECHNICAL SPECIFICATION:
LIGHT DUTY SQUARE
SFRC CONCRETE GRATING COVER AND FRAME LD 2.5T
CLEAR OPENING: 600 X 600 MM
COVER SIZE: 700 X 700 X 50 MM
FRAME SIZE: 830 X 830 X 100 MM
WEIGHT PER SET 125 KGS.
LOAD CAPACITY AS PER IS:12592-2002 2.5T
(ALL DIMENSIONS ARE IN MM)
DIMENSIONAL TOLERANCE +5MM