



Technical Specification/ Product Datasheet

KK-FRP AND KONCRETE PRODUCTS PVT LTD

1114 Hubtown Solaris

Prof N.S Phadke Road, Andheri (E)

Mumbai-400 069

INDIA

Ph: +91 22 66913250 ,

Mob: +91 9822036550 / 9850089903 ,


email: info@kkfrp.com / kkmgnsk@gmail.com

Web: www.kkfrp.com


Specific Product Code/s:	GGMD-06
Product Group:	KK-FRP FIBREGLASS COMPOSITE STORM WATER GRATING COVER & FRAME
Sub-Category:	Medium Duty MD 12.5 T Cap. As per BSEN124:2015
Material Composition :	Unsaturated Polyester Resin UV Resistant ISO Grade, Emulsion Fibreglass Matt E Class, Accelerators, UV Resistant Pigment, Polymer Concrete in Quartz as Core,
Basic Dimensions (mm):	Clear Opening 750 x 750 mm Cover Size: 810 x 810 mm Cover Height: 30 mm Frame Size: 880 x 880 mm Frame Height: 60 mm
Weight (kgs):	Approx. 58 kg
Load Rating Classification:	MD-12.5T
Features:	<ul style="list-style-type: none">➤ FRP Manhole Cover & Frame MD-12.5T as per BSEN124.➤ Medium duty design to cope with the demands of Medium duty traffic in car parking of residential, commercial areas , Roads , carriageways, etc.➤ Choice of Colour Available.➤ Anti skid surface.➤ Waterproof, Weatherproof, Burglar proof , Non corossive, High Strenght to Wt ratio, Easy of handing as Light wt , Heat Resistant, Shockproof .➤ Provision for Logo of Buyer.



DETAILED DRAWING
KK-FRP COMPOSITE STORM WATER GRATING COVER & FRAME
CLEAR OPENING 750 X 750 MM CAP 12.5T

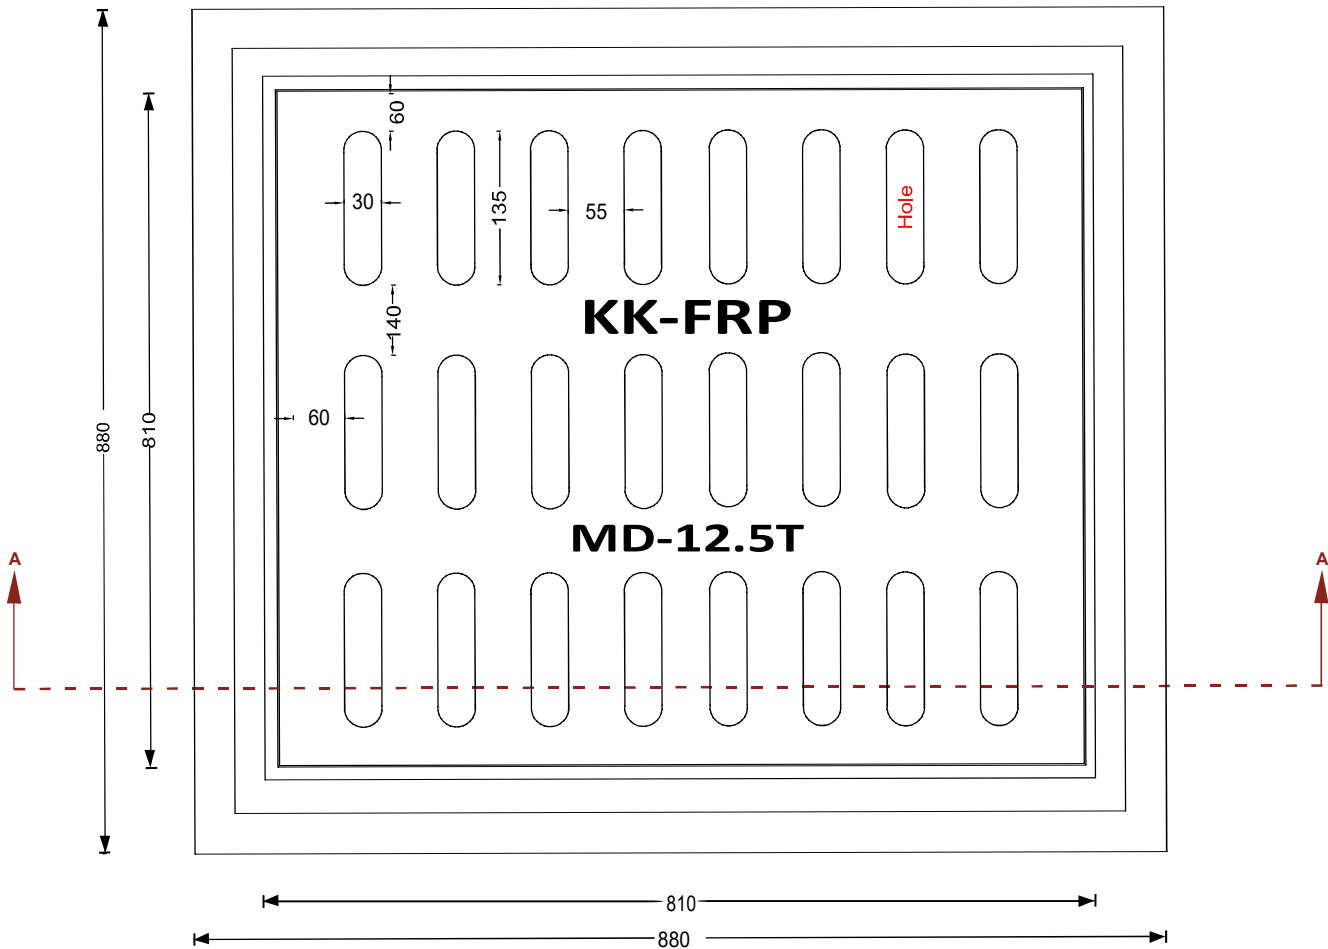

PLAN

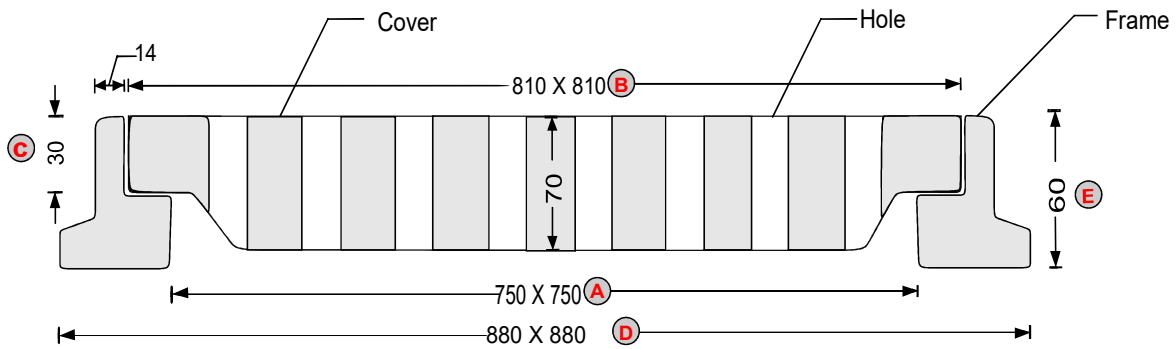

SECTION AA

ALL DIMENSIONS IN MM, DIMENSIONAL TOLERANCE +/- 1%.

CLEAR OPENING (750 X 750)	A
OUTER COVER SIZE (810 X 810)	B
OUTER FRAME SIZE (880 X 880)	D
COVER THICKNESS (30)	C
FRAME THICKNESS (60)	E
Approx. Weight 58 kg	