

Technical Specification/ Product Datasheet





KK-FRP AND KONCRETE PRODUCTS PVT LTD


1114 Hubtown Solaris
Prof N.S Phadke Road, Andheri (E)
Mumbai-400 069
INDIA
Ph: +91 22 66913250 ,
Mob: +91 9822036550 / 9850089903 ,
email: info@kkfrp.com / kkmgnsk@gmail.com
Web: www.kkfrp.com




Specific Product Code/s:	MCHD17
Product Group:	KK-FRP FIBREGLASS COMPOSITE MANHOLE COVER & FRAME
Sub-Category:	Heavy Duty HD 25 T Cap. As per BSEN124:2015
Material Composition :	Unsaturated Polyester Resin UV Resistant ISO Grade, Emulsion Fibreglass Matt E Class, Accelerators, UV Resistant Pigment, Polymer Concrete in Quartz as Core,
Basic Dimensions (mm):	Clear Opening 1000 x 1000 mm Cover Size: 1080 x 1080 mm Cover Height: 50 mm Frame Size: 1200 x 1200 mm Frame Height: 80 mm
Weight (kgs):	Approx. 170 kg
Load Rating Classification:	C250 (25T)
Features:	<ul style="list-style-type: none">➤ FRP Manhole Cover & Frame C250 as per BSEN124.➤ Heavy duty design to cope with the demands of heavily traffic in Main Roads , carriageways , Parkings etc.➤ Key Holes 4nos with (SS Key optional) & Lifting device provided .➤ Choice of Colour Available.➤ Anti skid surface.➤ Waterproof, Weatherproof, Burglar proof , Non corrossive, High Strenght to Wt ratio, Easy of handing as Light wt , Heat Resistant, Shockproof .➤ Provision for Logo of Buyer.➤ Additional Provision of Gasket (O-Ring) 6 mm Dia & SS Nut Bolts with Washer to make Water Tight (Optional) .

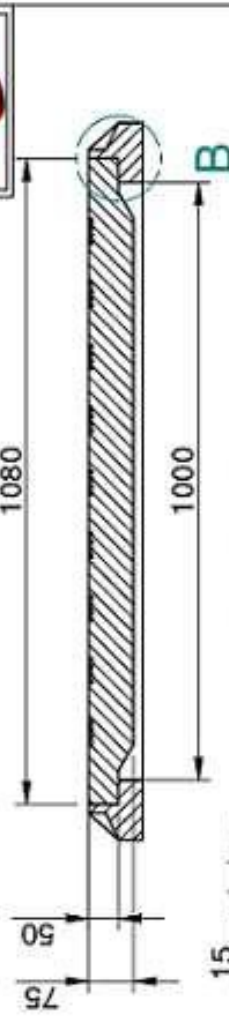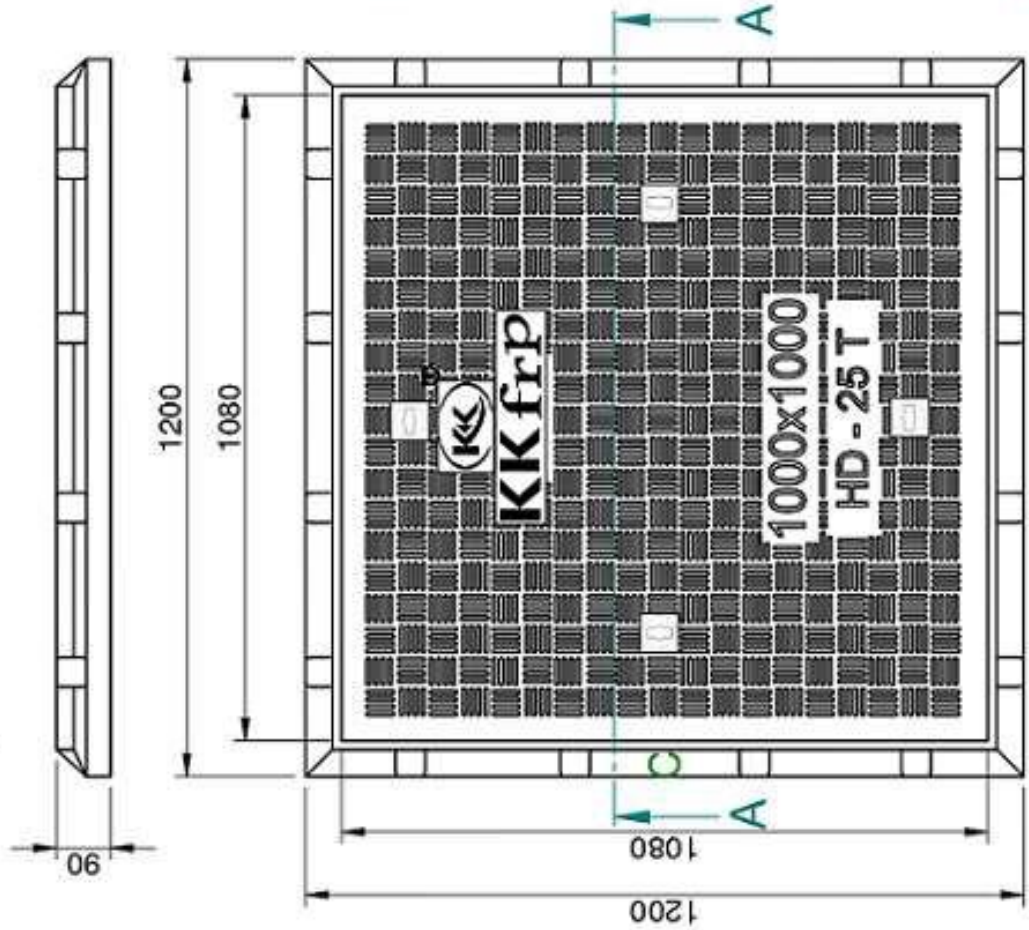


SECTION A-A

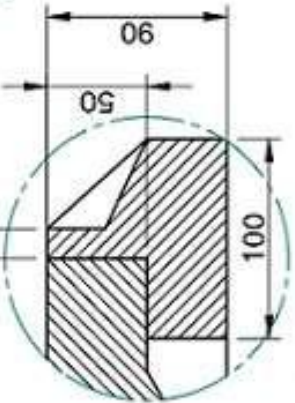

DETAIL B



DETAIL C
KEY HOLE
FOR LIFTING

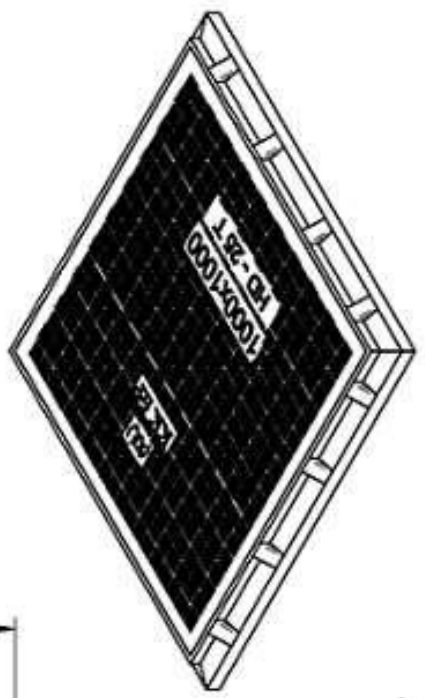

- ① CLEAR OPENING = 1000 x 1000 MM
- ② OUTER FRAME SIZE = 1200 x 1200 x 90 MM
- ③ OUTER COVER SIZE = 1080 x 1080 x 50 MM
- ④ APPROX WEIGHT = 175 KG

	Drawn	RJ	Checked	AB	Scale	1:5	
	DESCRIPTION:	MCHD-17	Sheet No.	2 of 2	DRG. NO.	MCHD-17-1000x1000	

KK frp

CONFIDENTIAL INFORMATION
(UNAUTHORISED DISCLOSURE PROHIBITED)

NOTE:-
1. ALL DIMENSIONS ARE IN MM.
2. DIMENSIONAL TOLERANCE +/- 1%