

Technical Specification/ Product Datasheet



KK-FRP AND KONCRETE PRODUCTS PVT LTD

1114 Hubtown Solaris
 Prof N.S Phadke Road, Andheri (E)
 Mumbai-400 069
 INDIA
 Ph: +91 22 66913250 ,
 Mob: +91 9822036550 / 9850089903 ,
 email: info@kkfrp.com / kkmgnsk@gmail.com
 Web: www.kkfrp.com





Specific Product Code/s:	MHCF38
Product Group:	KK SFRC CONCRETE MANHOLE COVER & FRAME
Sub-Category:	Light Duty LD 2.5T Cap. As per IS:12592:2002
Material Composition :	Ordinary Portland Cement 53 Grade. Reinforcement 6 TMT. Bars Fe 500 Grade, MS Sheet at edges 1.30 mm thick.
Concrete Grade :	M40
Water Cement Ratio:	0.35
Basic Dimensions (mm):	Clear Opening 900 x 900 mm Cover Size: 1000 x 1000 mm Cover Height: 50 mm Frame Size: 1130 x 1130 mm Frame Height: 100 mm
Weight (kgs):	Approx. 220 kgs
Load Rating Classification:	LD 2.5T

Features:

- SFRC Concrete Manhole Cover & Frame LD 2.5T as per IS:12592:2002.
- Light duty design to cope with the demands of Light duty traffic in foot paths, cycle tracks, car parking of residential areas etc
- 2 Nos Lifting Hooks 8 mm Dia TMT Bar .
- Choice of Colour Available.
- Anti skid surface.
- Waterproof, Weatherproof, Burglar proof, Non corrosive, High Strength to Wt ratio , Heat Resistant, Shockproof .

DETAILED DRAWING

KK SFRC CONCRETE MANHOLE COVER AND FRAME CLEAR OPENING 900 X 900 MM CAP 2.5T

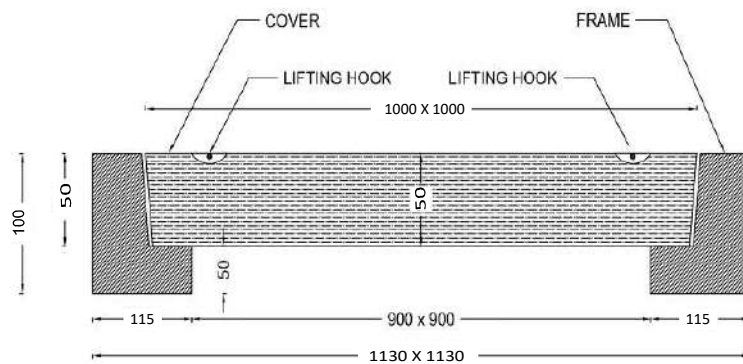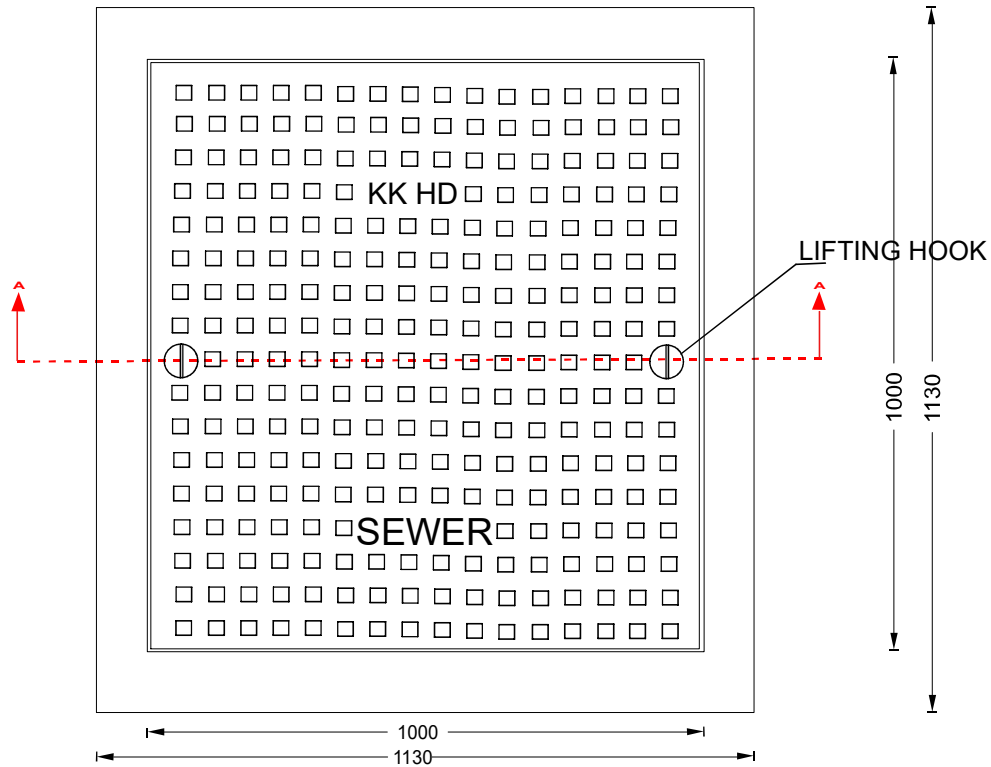

<p>KK-FRP AND KONCRETE PRODUCTS PVT LTD TECHNICAL SPECIFICATION: LIGHT DUTY SQUARE SFRC CONCRETE MANHOLE COVER AND FRAME LD 2.5T CLEAR OPENING: 900 X 900 MM COVER SIZE: 1000 X 1000 X 50 MM FRAME SIZE : 1130 X 1130 X 100 MM WEIGHT PER SET 220 KGS. LOAD CAPACITY AS PER IS:12592-2002 2.5T (ALL DIMENSIONS ARE IN MM) DIMENSIONAL TOLERANCE +5MM</p>
--